

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 888 093 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
18.07.2001 Bulletin 2001/29

(21) Application number: 97904958.2

(22) Date of filing: 05.03.1997

(51) Int Cl.7: **A61F 2/06**

(86) International application number:  
PCT/CA97/00151

(87) International publication number:  
WO 97/32543 (12.09.1997 Gazette 1997/39)

(54) **EXPANDABLE STENT**

EXPANDIERBARER STENT

EXTENSEUR DEPLOYABLE

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE  
Designated Extension States:  
AL LT LV RO SI

(30) Priority: 05.03.1996 CA 2171047  
03.05.1996 CA 2175722  
17.09.1996 CA 2185740  
10.12.1996 CA 2192520

(43) Date of publication of application:  
07.01.1999 Bulletin 1999/01

(60) Divisional application:  
00121964.1 / 1 066 804

(73) Proprietor: Divyslo Solutions ULC  
Vancouver, British Columbia V6M 3Y3 (CA)

(72) Inventors:  
• PENN, Ian, M.  
Vancouver, British Columbia V6R 4E9 (CA)  
• RICCI, Donald, R.  
Vancouver, British Columbia V6R 1Z6 (CA)

(74) Representative:  
Plougmann, Vingtoft & Partners A/S  
Sankt Annae Plads 11,  
P.O. Box 3007  
1021 Copenhagen K (DK)

(56) References cited:  
EP-A- 0 669 114 WO-A-95/31945  
WO-A-96/03092 WO-A-96/14028

EP 0 888 093 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to an expandable stent.

## BACKGROUND ART

[0002] Stents are generally known. Indeed, the term "stent" has been used interchangeably with terms such as "intraluminal vascular graft" and "expandable prosthesis". As used throughout this specification the term "stent" is intended to have a broad meaning and encompasses any expandable prosthetic device for implantation in a body passageway (e.g. a lumen or artery).

[0003] In the past six to eight years, the use of stents has attracted an increasing amount of attention due the potential of these devices to be used, in certain cases, as an alternative to surgery. Generally, a stent is used to obtain and maintain the patency of the body passageway while maintaining the integrity of the passageway. As used in this specification, the term "body passageway" is intended to have a broad meaning and encompasses any duct (e.g. natural or iatrogenic) within the human body and can include a member selected from the group comprising: blood vessels, respiratory ducts, gastrointestinal ducts and the like.

[0004] Initial stents were self-expanding, spring-like devices which were inserted in the body passageway in a contracted state. When released, the stent would automatically expand and increase to a final diameter dependent on the size of the stent and the elasticity of the body passageway. An example of such a stent is known in the art as the Wallstent™.

[0005] The self-expanding stents were found by some investigators to be deficient since, when deployed, they could place undue, permanent stress on the walls of the body passageway. Further, upon expansion, the stent would shorten in length in an unpredictable fashion thereby reducing the reliability of the stent. This led to the development of various stents which were controllably expandable at the target body passageway so that only sufficient force to maintain the patency of the body passageway was applied in expanding the stent.

[0006] Generally, in these later systems, a stent, in association with a balloon, is delivered to the target area of the body passageway by a catheter system. Once the stent has been properly located (for example, for intravascular implantation the target area of the vessel can be filled with a contrast medium to facilitate visualization during fluoroscopy), the balloon is expanded thereby expanding the stent by plastic deformation so that the latter is urged in place against the body passageway. As indicated above, the amount of force applied is at least that necessary to maintain the patency of the body passageway. At this point, the balloon is deflated and withdrawn within the catheter, and subsequently removed. Ideally, the stent will remain in place and maintain the target area of the body passageway substantially free

of blockage (or narrowing).

[0007] A stent which has gained some notoriety in the art is known as the Palmaz-Schatz™ Balloon Expandable Stent (hereinafter referred to as "the Palmaz-Schatz stent"). This stent is discussed in a number of patents including United States patents 4,733,665, 4,739,762, 5,102,417 and 5,316,023.

[0008] Another stent which has gained some notoriety in the art is known as the Gianturco-Roubin Flex-Stent™ (hereinafter referred to as "the Gianturco-Roubin stent"). This stent is discussed in a number of patents, including United States patents 4,800,882, 4,907,336 and 5,041,126.

[0009] Other types of stents are disclosed in the following patents:

United States patent 5,035,706 (Gianturco et al.),  
United States patent 5,037,392 (Hillstead),  
United States patent 5,147,385 (Beck et al.),  
United States patent 5,282,824 (Gianturco),  
Canadian patent 1,239,755 (Wallsten), and  
Canadian patent 1,245,527 (Gianturco et al.).

[0010] While these prior art stents have achieved a varying degree of success, the art is constantly in need of new stents having improved flexibility and stability while being able to be readily implanted with little or no trauma to the target lumen.

[0011] In our Canadian patent application number 2,134,997 (Penn et al.) there is described an improved expandable stent. The stent comprises a tubular wall disposed between the proximal end and the distal end. The tubular wall has a longitudinal axis and a porous surface defined by a plurality of intersecting members arranged to define a first repeating pattern. The first repeating pattern comprises a polygon having a pair of side walls substantially parallel to the longitudinal axis. A first concave-shaped wall and a second convex-shaped wall connect the side walls. The first wall and the second wall are equidistant along an axis which is parallel to the longitudinal axis. The stent is expandable from a first, contracted position to a second, expanded position upon the application of a radially outward force exerted on the stent.

[0012] As disclosed in the '997 application, the first repeating pattern can be implemented in, *inter alia*, a mono-tubular expandable stent and a bifurcated expandable stent.

[0013] While the stent disclosed in the '997 application is an advance in the art, in certain cases, a significant force is required to achieve expansion in the target body passageway. Further, implantation of the stent disclosed in the '997 application can be difficult in certain situations where the unexpanded stent must travel through a significantly curved pathway to the target body passageway.

[0014] Accordingly, it would be desirable to have an improved stent which overcomes these disadvantages.

It would be further desirable if the improved stent could be readily adapted, *inter alia*, to mono-tubular expandable stents and bifurcated expandable stents. The latter type of stents would be useful in treating aneurysms, blockages and other ailments. It would also be desirable if such a stent was relatively easy to implant. It would be further desirable if such a stent were capable of being uniformly expanded at relatively low pressure while obviating or mitigating longitudinal shrinkage thereof. It would be further desirable if such a stent were not susceptible to asymmetric internal coverage of the body passageway, a problem associated with "coil"-type stents - see, for example, United States patent 5,282,824 (Gianturco). It would be further desirable if such a stent was not susceptible to movement along the longitudinal axis of the body passageway during or after implantation. It would be further desirable if such a stent was characterized by a desirable balance of lateral flexibility in the unexpanded state and radial rigidity in the expanded state.

[0015] EP-A-0 669 114 (Fischell et al.) teaches a post-deployment stent structure having two undulating longitudinals - see Figure 8, column 3, lines 33-36 and column 4, line 55 to column 5, line 8. In Figure 8, of Fischell et al. the undulating longitudinal contains a series of S-shaped sections which occupy the entire space between adjacent rings (12). In Fischell et al., the forces received by the S-shaped section are focussed directly on the point where this element is connected to the adjacent rings (12).

[0016] WO-A-96/03092 (Brun et al.) teaches a stent having first and second meander patterns disposed orthogonally with respect to one another where the first meander pattern consists of rounded loops (20) which occupy the entire space between pairs of the second meander pattern - see Figure 7. In Brun et al., the forces received by the loops (20) of the first meander pattern are focussed on the point where these elements are connected to the adjacent second meander pattern.

#### DISCLOSURE OF THE INVENTION

[0017] It is an object of the present invention to provide a novel expandable stent which obviates or mitigates at least one of the above-mentioned disadvantages of the prior art.

[0018] Accordingly, the invention provides an unexpanded stent comprising a proximal end and a distal end in communication with one another, a tubular wall disposed between the proximal end and the distal end, the tubular wall having a longitudinal axis and a porous surface defined by a plurality of rows of intersecting members, adjacent rows of intersecting members being interconnected by a series of longitudinal struts, the stent being expandable from a first, contracted position to a second, expanded position upon the application of a radially outward force on the stent, said stent being characterised in that each longitudinal

strut comprises an arcuate flexure means disposed in spaced relation between adjacent rows of intersecting members to allow for substantially complementary extension and compression of a diametrically opposed pair of the longitudinal struts upon flexure of the stent.

[0019] Thus, in this aspect of the present invention, we have now discovered that the use of flexure means in the series of longitudinal struts leads to a very desirable balance of lateral flexibility of the unexpanded stent and radial rigidity of the expanded stent. Practically, the flexure means confers lateral flexibility to the unexpanded stent by allowing diametrically opposed pairs of the longitudinal struts to undergo substantially complementary extension and compression. If one considers a stent in a flexed state, a first longitudinal strut disposed at the tangent of the bend (i.e. in two dimensions) will expand in response to the bending moment. In contrast, a second longitudinal strut disposed diametrically opposite (this can mean above, below or in the same radial plane as) the first longitudinal strut will compress in response to the bending moment. Generally, the degree of extension and compression will be substantially complementary. In other words, in most cases, the first longitudinal strut will expand and lengthen a first distance and the second longitudinal strut will compress and shorten a second distance. Preferably, the first distance is greater than the second distance and most preferably, the sum of the first distance and the second distance is substantially equal to the sum of the original lengths of the first longitudinal strut and the second longitudinal strut.

[0020] The specific shape of the flexure means disposed in the longitudinal strut is not particularly restricted provided that it confers lateral flexibility to the unexpanded stent by allowing diametrically opposed pairs of the longitudinal struts to undergo substantially complementary extension and compression. The term "diametrically opposed pairs of the longitudinal struts", as used in this specification, is intended to have a broad meaning. Thus, the "pair" can include opposed struts in the same horizontal plane (i.e. the same ring of polygons) or in different horizontal planes (e.g. one strut in a first ring of polygons and the other diametrically opposed strut in a second ring of polygons above or below the first ring). Preferably, the flexure means comprises at least one lateral section disposed in the longitudinal strut, more preferably at least a first lateral section and a second lateral section disposed in the longitudinal strut. By "lateral section" is meant a section of the longitudinal strut which is bowed in or out of (i.e. radially from) the strut. The apex of the lateral section may be rounded. When the flexure means comprises a first lateral section and a second lateral section, the two sections may be symmetric or asymmetric (in the case of asymmetric this includes two sections of the same shape but different size and two sections of different and size). Further, when the flexure means comprises a first lateral section and a section lateral section, the sections may be bowed in the same or opposite direction.

[0021] A particularly preferred embodiment of the flexure means comprises a sinusoidal or S-shaped section (various examples of such a section are illustrated herein and discussed below). Preferably, the sinusoidal or S-shaped section is adjacent the second apex of the polygon and the remaining portion of the strut is substantially straight. This feature improves the lateral flexibility of the stent thereby facilitating implantation thereof and may further mitigate longitudinal shortening of the stent upon expansion.

[0022] In another preferred embodiment, at least one, more preferably both, of the side walls (i.e. longitudinal struts) of the polygon comprises the sinusoidal or S-shaped section. Preferably, the sinusoidal or S-shaped section is disposed at an end of the side wall. This feature improves the lateral flexibility of the stent thereby facilitating implantation thereof and may further mitigate longitudinal shortening of the stent upon expansion.

[0023] When a sinusoidal or S-shaped portion is disposed in the side walls and/or the strut connecting the first apex and the second apex (if present), the precise shape of the portion is not particularly restricted and generally takes the form of an "S". Thus, the sinusoidal or S-shaped portion may be comprised of a pair of joined curved sections wherein each curved section has an arc of about 180° - i.e. this is illustrated in Figure 8 of the present application. The term "arc" denotes the angle from one end of the curved section to the other about the radical point of the curved section. Alternatively, the sinusoidal or S-shaped portion may be comprised of a pair of joined curved sections wherein each curved section has an arc of greater than 180° - this is illustrated in Figure 9 of the present application. Further, the pair of joined curved sections can be of the same size (this is illustrated in Figures 8 and 9 of the present application) or of differing size (this is illustrated in Figure 10 of the present application), the latter being the most preferred embodiment.

[0024] Preferably, the series of longitudinal struts containing the flexure means comprises all substantially longitudinal struts comprised in the plurality of intersecting members making up the porous surface of the stent.

[0025] Preferably, the intersecting members are arranged to define a first repeating pattern comprised of a polygon having a pair of side walls substantially parallel to the longitudinal axis (i.e. a pair of the above-mentioned longitudinal struts comprising flexure means), a concave-shaped first wall having a first apex and a convex-shaped second wall having a second apex connecting the side walls. As used throughout this specification, the terms "concave-shaped" and "convex-shaped" are intended to have a broad meaning and a shape having apex. Thus, the first wall has a first apex and the second wall has a second apex. Thus, the first apex (i.e. of the concave-shaped first wall) is directed into the polygon whereas the second apex (i.e. of the convex-shaped second wall) is directed away from the polygon.

[0026] Preferably, the present invention relates to an

expandable stent comprising a proximal end and a distal end in communication with one another, a tubular wall disposed between the proximal end and the distal end, the tubular wall having a longitudinal axis and a porous surface defined by a plurality of intersecting members arranged to define a first repeating pattern comprised of a polygon having a pair of side walls substantially parallel to the longitudinal axis, each side wall comprising the arcuate flexure means described above, a concave-shaped first wall having a first apex and a convex-shaped second wall having a second apex, the first wall and the second wall connecting the side walls, at least one of the first apex and the second apex being substantially flat, the stent being expandable from a first, contracted position to a second, expanded position upon the application of a radially outward force on the stent.

[0027] In this preferred aspect of the invention, it is has been discovered that the use of such a first repeating pattern (including at least one of the first apex and second apex being substantially flat) results in an improved stent. The advantages associated with the use of such a first repeating pattern include the following:

1. the force required to expand the stent is substantially reduced;
2. the stent is subjected to less traumatic stress during expansion;
3. plastic deformation of the stent during expansion is facilitated;
4. construction of the stent is facilitated; and
5. upon expansion of the stent, warpage of the first apex and the second apex is obviated or mitigated.

[0028] The provision of at least one of the first apex and the second apex being substantially flat usually results in the apex of the concave-shaped first wall and/or the convex-shaped second wall having a pair of shoulders. Preferably, these shoulders are rounded. The provision of such round shoulders results in the following additional advantages:

6. mitigation of potential trauma to the target body passageway from: (i) endoluminal contents within the passageway, and (ii) the contours of the passageway;
7. the resulting expanded stent is more stream-lined and flow-directed which mitigates potential trauma to the target body passageway;
8. further reduction in the force required to expand the stent;
9. an improved stent expansion ratio is achieved (i.e. ratio of expanded stent diameter at maximum expansion to unexpanded stent diameter);
10. upon expansion of the stent, the concave-shaped first wall and the convex-shaped second wall are in a substantially orthogonal relationship to the longitudinal axis thereby improving the rigidity

of the stent (this is very important to mitigate the occurrence of stent recoil); and

11. the pattern of the expanded stent improves the rheology of fluid flow in the body passageway.

[0029] When the stent of the present invention includes the above-mentioned first repeating pattern, it is preferred to provide a connecting strut between the first apex and the second apex. Generally, the connecting strut will be substantially longitudinal (i.e. it will be parallel to the longitudinal axis of the stent). This feature mitigates lifting of the shoulders referred to above as the stent is flexed, for example, when passing the stent through a curved body passageway. The result of this is that potential trauma to the body passageway is mitigated since scraping of the body passageway by the shoulders is mitigated.

[0030] In a preferred embodiment, the connecting strut is curved with respect to the longitudinal axis (this is described and illustrated hereinbelow). Preferably, the strut is sufficiently curved to have a length of up to about 35%, more preferably up to about 15%, even more preferably in the range of from about 2% to about 8%, most preferably in the range of from about 3% to about 7%, greater than the distance between the first apex and the second apex. This feature improves the lateral flexibility of the stent thereby facilitating implantation thereof. The curvature may be designed to comprise the flexure means discussed above. In other words, the shape of the curvature may be designed substantially complementary extension and compression of the connecting strut upon flexure of the stent.

[0031] Yet another preferred feature of the stent of the present invention is the provision of one or both of the side walls of the polygon of the repeating pattern being curved. Preferably, both side walls are curved. More preferably the curvature serves as flexure means as described above. Ideally, the curved side wall has length of up to about 35%, more preferably up to about 15%, even more preferably in the range of from about 2% to about 8%, most preferably in the range of from about 3% to about 7%, greater than the distance between the termini of the concave-shaped first wall and the concave-shaped second wall. This feature improves the lateral flexibility of the strut thereby facilitating implantation thereof.

[0032] Preferably, both the strut and the side walls are curved. More preferably, each of the curved members are of substantially the same length.

[0033] Yet another preferred feature of the stent of the present invention is, in addition to the strut and side walls of the polygon being curved, the provision of all longitudinal walls of the polygon of the repeating pattern being curved. Thus, in this embodiment of the invention, the concave-shaped first wall comprises a pair of curved first apex walls connecting the first apex and the side walls of the polygon, and the convex-shaped second wall comprises a pair of curved second apex walls con-

necting the second apex and the side walls of the polygon. Again, the curvature may be designed to comprise the flexure means discussed above. Ideally, the curved first apex walls and the curved second apex walls each have a length of up to about 35%, more preferably up to about 15%, even more preferably in the range of from about 2% to about 8%, most preferably in the range of from about 3% to about 7%, greater than the straight (i.e. non-curved) distance between the first apex and the side walls, and the second apex and the side walls, respectively. In this embodiment, it is further preferred to have substantially all adjacent curved walls in an annular section of the repeating pattern (i.e. of the struts, first apex wall, second apex wall and side walls) are substantially equidistant from one another. This preferred feature of the stent of the present invention even further enhances the lateral flexibility of the stent thereby further facilitating implantation thereof.

[0034] Yet another preferred feature of the stent of the present invention is provision of a porous surface comprising multiple designs. Specifically, in certain cases, it may be desirable to design the stent to varying degrees of relative flexibility and rigidity along the length thereof. Thus, the relatively flexible portion(s) of such a stent would facilitate delivery of the stent to a target body passageway through a relatively tortuous route, while the relatively rigid portion(s) of the stent serves facilitate maintaining the patency of the body passageway. As will be discussed in more detail hereinbelow, this may be achieved by varying the repeating pattern design along the longitudinal length of the stent.

[0035] An aspect of the present invention relates to the provision of an expandable bifurcated stent. As used throughout this specification, the term "bifurcated stent" is intended to have a broad meaning and encompasses any stent having a primary passageway to which is connected at least two secondary passageways. Thus, trifurcated stents are encompassed herein. Further, one of the secondary passageways can be a continuation of the primary passageway with the result that the other secondary passageway is essentially a side branch to the primary passageway.

[0036] The stent of the present invention (bifurcated or mono-tubular) can further comprise coating material thereon. The coating material can be disposed continuously or discontinuously on the surface of the stent. Further, the coating may be disposed on the interior and/or the exterior surface(s) of the stent. The coating material can be one or more of a biologically inert material (e.g. to reduce the thrombogenicity of the stent), a medicinal composition which leaches into the wall of the body passageway after implantation (e.g. to provide anticoagulant action, to deliver a pharmaceutical to the body passageway and the like) and the like.

[0037] The stent is preferably provided with a biocompatible containing, in order to minimize adverse interaction with the walls of the body vessel and/or with the liquid, usually blood, flowing through the vessel. The

coating is preferably a polymeric material, which is generally provided by applying to the stent a solution or dispersion of preformed polymer in a solvent and removing the solvent. Non-polymeric coating material may alternatively be used. Suitable coating materials, for instance polymers, may be polytetrafluoroethylene or silicone rubbers, or polyurethanes which are known to be biocompatible. Preferably however the polymer has zwitterionic pendant groups, generally ammonium phosphate ester groups, for instance phosphoryl choline groups or analogues thereof. Examples of suitable polymers are described in International application number WO-A-93/16479 and WO-A-93/15775. Polymers described in those specifications are hemo-compatible as well as generally biocompatible and, in addition, are lubricious. It is important to ensure that the surfaces of the stent are completely coated in order to minimize unfavourable interactions, for instance with blood, which might lead to thrombosis.

[0038] This good coating can be achieved by suitable selection of coating conditions, such as coating solution viscosity, coating technique and/or solvent removal step.

[0039] In another embodiment of the invention, the stent may be joined to a polymer material. Specifically, a polymer material may be extruded onto the stent in such a manner that it envelops at least a portion of the stent. This technique may be used to join two or more stents with a flexible polymeric tube. This technique may also be used to join a stent to another prosthetic device such as a tube, a graft and the like. Thus, in this embodiment of the invention, the stent is incorporated into an endoluminal prosthesis.

[0040] In yet another embodiment of the invention, the stent may be secured (e.g. by suturing) to an existing endoluminal prosthesis such as Goretex™ material or to biological material such as basilic vein. In this regard, securing of the stent to the existing endoluminal prosthesis or biological material may be facilitated by designing the stent such that an end of the stent comprises an annular row of the above-mentioned polygons is having a convex-shaped wall with a flat apex.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0041] Embodiments of the present invention will be described with reference to the accompanying drawings wherein like numerals designate like parts and in which: Figure 1 illustrates an exploded perspective view of a mono-tubular stent prior to expansion;

Figure 1A illustrates an exploded view of a portion of the stent illustrated in Figure 1;

Figures 2-10 each illustrate a two dimensional representation of various embodiments (not to relative scale) of a repeating pattern useful in the stent of the present invention;

Figure 11 illustrates an ostial stenosis to which a

preferred embodiment of the invention may be applied; and

Figures 12a-12d illustrate various embodiments of flexure means (in two dimensions) which may be disposed in the longitudinal struts of preferred embodiments of the present stent.

#### BEST MODE FOR CARRYING OUT THE INVENTION

[0042] While the specific stent designs illustrated in Figures 1-7 are not covered by the present claims, a discussion thereof will be presented for the purpose of facilitating an understanding of the preferred embodiments of the present invention which are discussed hereinbelow with respect to the specific stent designs illustrated in Figures 8-11 and to the modifications to the flexure means illustrated in Figures 12a-12d.

[0043] With reference to Figure 1, there is illustrated a stent 10. Stent 10 comprises a proximal end 15 and a distal end 20. Stent further comprises a tubular wall 25 disposed between proximal end 15 and distal end 20. As illustrated, tubular wall 25 is porous. The porosity of tubular wall 25 is defined by a plurality of intersecting members 30. Intersecting members 30 define a first repeating pattern designated A in Figure 1.

[0044] As illustrated and with further reference to Figure 1A, repeating pattern A is a polygon comprising a pair of side walls 35,40. Side walls 35,40 are substantially parallel to a longitudinal axis 45 of stent 10 and thus side walls 35,40 may be considered to be longitudinal struts (indeed with reference to each of the drawings, side walls may also be considered to be longitudinal struts). Side walls 35,40 are connected by a concave-shaped wall 50 and a convex-shaped wall 60.

[0045] As illustrated, concave-shaped wall 50 is made up of a trio of segments 52,54, 56. In the illustrated embodiment, segment 54 is the apex of concave-shaped wall 54. As is evident, segment 54 is a flat apex and results in the provision of a pair of substantially square shoulders 57,58. Convex-shaped wall 60 is made up of a trio of segments 62,64,66. In the illustrated embodiment, segment 64 is the apex of convex-shaped wall 60.

[0046] It will be appreciated by those of skill in the art that the provision of first repeating pattern A, as illustrated, necessarily defines and provides for a second repeating pattern B. It will also be appreciated by those of skill in the art that second repeating pattern B is a mirror image of first repeating pattern A taken along an axis (not shown) substantially normal to longitudinal axis 45. Thus, in the illustrated embodiments, adjacent rows of repeating pattern A and repeating pattern B may be considered to be interlocking polygons or "arrowheads".

[0047] It will be further appreciated by those of skill in the art that the shape of concave-shaped wall 50 and/or convex-shaped wall 60 can be modified without departing from the function and performance of the stent provided that at least one of concave-shaped wall 50 and convex-shaped wall 60 retain a substantially flat

apex. For example, the trio of segments can be replaced by a suitably curved or arcuate wall. Alternatively, more than three segments can be used to define concave-shaped wall 50 and/or convex-shaped wall 60. Other modifications will be apparent to those of skill in the art.

[0048] It will be further appreciated by those of skill in the art that various walls of first repeating pattern A and second repeating pattern B may be omitted (and even desired) at selected points along the body of the stent without departing from the spirit and scope of the invention. For example, it is possible to omit one or both of side walls 35 and 40 at selected points along the body of the stent with a view to improving the longitudinal flexibility of the stent. Further, it is possible to omit one or more of segments 62, 64, 66 at selected points along the body of the stent with a view to improving the lateral flexibility of the stent.

[0049] Still further, the stent depicted in Figure 1 can be modified to omit, on a selected basis, first repeating pattern A and/or second repeating pattern B with a view to improving flexibility of the stent and to allow access to other structures (e.g. side branches/artries) outside the bounds of the stent.

[0050] With reference to Figures 2-10, there are illustrated a number of preferred embodiments of repeating pattern A. For the sake of clarity, numerals in Figures 2-8 have the same final two digits as the corresponding numerals in Figure 1. Thus, for example, the concave-shaped wall is depicted as element 50 in Figure 1, element 150 in Figure 2, element 250 in Figure 3, etc.

[0051] Thus, as illustrated in Figure 2, repeating pattern A is comprised of a concave-shaped wall 150 and a convex-shaped wall 160, the former having a flat apex. Further, as illustrated, concave-shaped wall 150 and convex-shaped wall 160 are not equidistant along an axis orthogonal to the longitudinal axis of the stent (not shown). Thus, in this embodiment, the flat apex in concave-shaped wall 150 has been modified such that it comprises a pair of substantially rounded shoulders 157, 158.

[0052] With reference to Figure 3, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 3, the flat apex of concave-shaped wall 250 has been modified to provide a pair of rounded shoulders 257, 258. Further, a strut 270 has been added to connect segment 254 of concave-shaped wall 250 and segment 264 of convex-shaped wall 260. As illustrated, strut 270 is thinner in dimension than any of the segments making up concave-shaped wall 250 and convex-shaped wall 260. Thus, strut 270 may be considered as a relatively thin retention wire which reconciles the need for retaining flexibility in the strut with mitigating lifting of rounded shoulders 257, 258 when the stent is delivered to the target body passageway through a relatively tortuous route.

[0053] With reference to Figure 4, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 4, the flat apex of concave-shaped wall 350 has been

modified to provide a pair of rounded shoulders 357, 358. Further, a curved strut 370 has been added to connect segment 354 of concave-shaped wall 350 and segment 364 of convex-shaped wall 360.

5 [0054] With reference to Figure 5, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 5, the flat apex of concave-shaped wall 450 has been modified to provide a pair of rounded shoulders 457, 458. Further, a curved strut 470 has been added to connect segment 454 of concave-shaped wall 450 and segment 464 of convex-shaped wall 460. Further, side walls 435, 440 are also curved. As discussed above, since side walls 435, 440 are bowed in opposite directions in adjacent rows of repeating pattern A and B, substantially diametric side walls in adjacent rows will function as the flexure means described above.

10 [0055] With reference to Figure 6, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 6, concave-shaped wall 550 has been modified to have a flat apex 554 having a pair of rounded shoulders 557, 558 and convex-shaped wall 560 has been modified also to have a flat apex 564 having a pair of rounded shoulders 567, 568. Further, a curved strut 570 has been added to connect flat apex 554 of concave-shaped wall 550 and flat apex 564 of convex-shaped wall 560. Further, side walls 535, 540 are also curved.

15 [0056] With reference to Figure 7, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 7, concave-shaped wall 650 has been modified to have a flat apex 654 having a pair of rounded shoulders 657, 658 and convex-shaped wall 660 has been modified also to have a flat apex 664 having a pair of rounded shoulders 667, 668. Further, a curved strut 670 has been added to connect flat apex 654 of concave-shaped wall 650 and flat apex 664 of convex-shaped wall 660. Further, side walls 635, 640 are also curved. Still further, walls 661, 662 which connect flat apex 664 to side walls 635, 640, respectively, and walls 651, 652 which connect flat apex 654 to side walls 635, 640, respectively, are each curved. It is believed that this design even further enhances the lateral flexibility of the stent.

20 [0057] With reference to Figure 8, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 7, concave-shaped wall 750 has been modified to have a flat apex 754 having a pair of rounded shoulders 757, 758 and convex-shaped wall 760 has been modified also to have a flat apex 764 having a pair of rounded shoulders 767, 768. Further, a strut 770 has been added to connect flat apex 754 of concave-shaped wall 750 and flat apex 764 of convex-shaped wall 760. Further, side walls 735, 740 have been modified to include a sinusoidal (or S-shaped) portion 736, 741, respectively, adjacent convex-shaped wall 760. Further, strut 770 has been modified to include a sinusoidal (or S-shaped) portion 771 adjacent flat apex of concave-shaped wall 750. This design even further enhances the lateral flexibility of the stent.

25 [0058] With reference to Figure 9, repeating pattern

A is similar to the one illustrated in Figure 1. In Figure 9, concave-shaped wall 850 has been modified to have a flat apex 854 having a pair of rounded shoulders 857,858. Further, side walls 835,840 have been modified to include a pair of sinusoidal (or S-shaped) portions 836,841, respectively, adjacent convex-shaped wall 860. This design further enhances the lateral flexibility of the stent illustrated in Figure 2. It should be noted that each sinusoidal (or S-shaped) portion 836,841 in Figure 9 comprises a pair of adjoined curved sections wherein each curved section has an arc of greater than 180° - another way to conceptualize this is a pair of link omega-shaped sections (cf. with the curved sections of sinusoidal (or S-shaped) portions 736,741,771 in Figure 8).

[0059] With reference to Figure 10, repeating pattern A is similar to the one illustrated in Figure 1. In Figure 10, concave-shaped wall 950 has been modified to have a flat apex 954 having a pair of rounded shoulders 957,958. Further, a strut 970 has been added to connect flat-apex 954 of concave-shaped wall 950 and segment 964 of convex-shaped wall 960. Further, side walls 935,940 have been modified to include a pair of sinusoidal (or S-shaped) portions 936,941, respectively, adjacent convex-shaped wall 960. Further, strut 970 has been modified to include sinusoidal (or S-shaped) portion 971 adjacent flat apex of concave-shaped wall 950. It should be noted that each sinusoidal (or S-shaped) portion 936,941,971 in Figure 10 comprises a pair of adjoined curved sections wherein each curved section has an arc of greater than 180°. Further, the curved sections in sinusoidal (or S-shaped) portions 936,941 are of the same size, whereas the curved sections in sinusoidal (or S-shaped) portion 971 are of different size. A distinct advantage of the interspersed sinusoidal (or S-shaped) portions 936,941 and sinusoidal (or S-shaped) portion 971 is that substantially uniform radial expansion of all segments in this stent will occur without specific regard to the expansion forces generated by the balloon or other means used to deploy the stent. Further, this design minimizes the force (e.g. pressure from a balloon) required to expand the stent. Still further, this design enhances the lateral flexibility of the stent.

[0060] As will be apparent to those of skill in the art, sinusoidal (or S-shaped) portion 971 is offset with respect to sinusoidal (or S-shaped) portions 936,941 in a panel horizontal to the longitudinal axis of repeating pattern A. The offset nature of these sinusoidal (or S-shaped) portions serves to increase the bending points in the stent allowing the stent to bend while avoiding buckling thereof. Thus, the staged distribution of the sinusoidal (or S-shaped) portions over a large portion of the surface area of the stent serves to improve the flexibility of the stent.

[0061] The advantages of the various alternate embodiments illustrated in Figures 2-10 are discussed hereinabove.

[0062] As discussed above, the use of flexure means, such as the sinusoidal (or S-shaped) portions in the de-

sign of the stents illustrated in Figures 8-10, in the longitudinal struts in the stent design provides the benefit of improved flexibility of the stent in the unexpanded state. Specifically, during flexure of the stent, provision of such a feature allows the inner stent surface adjacent the bend to compress while concurrently allowing the outer stent surface adjacent the bend to extend, all while maintain substantially intact the integral strength of stent and avoiding buckling of the stent.

[0063] Accordingly the provision of such flexure means in the longitudinal struts of an otherwise general stent design is another feature of invention. With reference to Figures 12a-12d there are illustrated various alternatives of bowed lateral sections which can be used in place of sinusoidal (or S-shaped) portions 736,741,771 in Figure 8, sinusoidal (or S-shaped) portions 836,841 in Figure 9 and sinusoidal (or S-shaped) portions 936,941,971 in Figure 10.

[0064] The flexure means illustrated in Figure 12a may be considered to be a single omega, whereas that illustrated in Figure 12b may be considered to be an inline (and unlinked) double omega and that illustrated in Figure 12c may be considered to be an opposed (and unlinked) double omega. The flexure means illustrated in Figure 12d may be considered to be an opposed omega (facilitates extension)/U-joint (facilitates compression). Other specific designs which are within the spirit and scope of the present invention will be apparent to those of skill in the art.

[0065] Those of skill in the art will recognize that it is possible to combine various of the alternate embodiments illustrated in Figures 2-10 and 12 to derive further designs which are still within the spirit and scope of the present invention. Specifically, a preferred embodiment of the present invention involves combining various of the repeating patterns illustrated in Figures 2-10 to achieve a stent with relatively flexible and rigid regions, for example, as follows:

F-R  
F-R-F  
R-F-R

wherein F is a relatively flexible region and R is a relatively rigid region. With reference to the embodiments illustrated in Figures 1-10, the trackability of the stent through a tortuous pathway is enhanced from the design illustrated in Figure 1 progressively through to the design illustrated in Figure 10. For example, an embodiment of the invention is a stent comprising a first section incorporating the design of Figure 10 and a second section incorporating the design of Figure 9. It is believed that such a multi-sectional design provides a very desirable combination of lateral flexibility (primarily from the design of Figure 9) with post-expansion radial rigidity (primarily from the design of Figure 10).

[0066] Another technique by which the relative flexibility/rigidity may be varied along the length of the stent involves varying the thickness of the segments making up the polygon discussed hereinabove. Specifically, the

thickness of the segments may be varied in the range of from about 0.0015 to about 0.0045 inches, preferably from about 0.0020 to about 0.0040 inches. The lower the thickness in this range, the more flexible the resulting stent design. Conversely, the higher the thickness in this range, the less flexible the resulting stent design. Thus, by judicious selection of segment thickness, the relative flexibility/rigidity of the stent may be varied along its length.

[0067] The provision of a stent with a variable relative flexibility/rigidity along its length is believed to be novel, especially a stent comprising a single relatively flexible portion and a single relatively rigid portion (i.e. the F-R embodiment discussed above). Such a stent would find immediate use in a number of applications. For, example, such a stent would be very desirable for implantation in an ostial stenosis (these typically occur in coronary arteries, vein grafts and renal arteries). In this regard, an ostial stenosis is illustrated in Figure 11 thereof. Thus, there is illustrated a right coronary cusp 105, a right coronary artery 110 and an ostial segment 115 of right coronary artery 110. As further illustrated a stenosis 120 presents a narrowing of ostial segment 115. Ideally, a stent capable of implantation into such an ostial stenosis must be of sufficient rigidity after expansion to resist the elastic recoil of the ostial blockage (Region Y in Figure 11). However, a stent of such sufficient rigidity will be deficient since it will either: (i) be retarded in its advance along the artery due to the sharp bend in the right coronary artery (Region X in Figure 11); or (ii) traverse the sharp bend in the right coronary artery but subsequently straighten Region X of right coronary artery 110 thereby increasing the likelihood of tearing the artery. Conversely, a stent of sufficiently flexibility to traverse the sharp bend in the right coronary artery (Region X in Figure 11) is susceptible to recoil in the ostial right coronary artery (Region Y in Figure 11). Accordingly, to the knowledge of the Applicant, there is no known effective manner by which a stent may be used to treat an ostial stenosis of the type illustrated in Figure 11. It is believed that a stent having variable relative rigidity/flexibility along its length as discussed above is a novel means by which an ostial stenosis may be treated. Figure 11 also serves to illustrate the substantially complementary extension and compression of longitudinal members in Region X of the right coronary artery.

[0068] The manner by which the present stent is manufactured is not particularly restricted. Preferably, the stent is produced by laser cutting techniques applied to a tubular starting material. Thus, the starting material could be a thin tube of a metal or alloy (non-limiting examples include stainless steel, titanium, tantalum, nitinol, Elgiloy, NP35N and mixtures thereof) which would then have sections thereof cut out to leave repeating pattern A discussed above. Thus, the preferred design of the present stent is one of a tubular wall which is distinct from prior art wire mesh designs wherein wire is conformed to the desired shape and welded in place.

The preferred tubular wall design of the present stent facilitates production and improves quality control by avoiding the use of welds and, instead, utilizing specific cutting techniques.

[0069] Preferably, the stent is coated with a solution of 1:2 (mole) copolymer of (methacryloyloxy ethyl)-2-(trimethylammonium ethyl) phosphate inner salt with lauryl methacrylate in ethanol (as described in Example 2 of International patent application WO-A-93/01221) as follows. The non-expanded stent may be placed in a tube having a slightly larger diameter than the stent. The tube may then be filled with coating solution and the solution allowed to drain steadily from the tube to form a completely coated stent. Immediately thereafter a stream of warm air or nitrogen may be directed through the tube at a linear velocity of 0.15 m/s at room temperature to 50°C for a period of 30 seconds to 5 minutes to dry the coating by evaporation of the ethanol solvent.

[0070] As an alternative or in addition (on top or underneath) to this coating, a cross-linkable coating may be used consisting of a polymer of 23 mole% (methacryloyloxy ethyl)-2-(trimethylammonium ethyl) phosphate inner salt, 47 mole% lauryl methacrylate, 5 mole%  $\gamma$ -trimethoxysilylpropyl methacrylate and 25 mole % of  $\gamma$ -hydroxypropyl methacrylate. This may be applied to the stent by the above described technique from a 5mg/ml ethanolic solution. The solution may be dried as described above and then cured by heating at 70 to 75°C for a period of at least about 1 hour, for instance overnight. This curing generally results in substantially complete reaction of the methoxy silyl groups, either with other methoxysilyl groups or with hydroxy groups derived from the hydroxypropyl methacrylate monomer, driving off methanol. In one preferred embodiment the crosslinkable coating is applied to the cleared stent, cured and then a further coating of the lauryl methacrylate copolymer described above is applied.

[0071] The coated stent may be sterilised by ethylene oxide, gamma radiation or electron beam and subsequently mounted onto a balloon catheter for delivery.

[0072] Stent 10 can be implanted using a conventional system wherein a guidewire, catheter and balloon can be used to position and expand the stent. Implantation of mono-tubular stents such as stent 10 is conventional and within the purview of a person skilled in the art. See, for example, any one of United States patents 4,733,665, 4,739,762, 5,035,706, 5,037,392, 5,102,417, 5,147,385, 5,282,824, 5,316,023 and any of the references cited therein or any of the references cited hereinabove. When the present stent is constructed as a bifurcated stent, it may be implanted using the procedure outlined in the '997 patent application incorporated herein by reference. Such a bifurcated stent may be manufactured, *inter alia*, by any of the methods disclosed in the Canadian patent application number 2,175,720 filed in Applicant's name on May 3, 1996.

[0073] It will be apparent to those of skill in the art that implantation of stent 10 can be accomplished by various

other means. For example, it is contemplated that the stent can be made of a suitable material which will expand when a certain temperature is reached. In this embodiment, the material may be a metal alloy (e.g. nitinol) capable of self-expansion at a temperature of at least about 30°C, preferably in the range of from about 30° to about 40°C. In this embodiment, the stent could be implanted using a conventional catheter and the radially outward force exerted on the stent would be generated within the stent itself. Further, stent 10 can be designed to expand upon the application of mechanical forces other than those applied by a balloon/catheter. For example, it is possible to implant stent 10 using a catheter equipped with a resisting sleeve or retaining membrane which may then be removed with the catheter once the stent is in position thereby allowing the stent to expand. Thus, in this example, the stent would be resiliently compressed and would self-expand once the compressive force (i.e. provided by the sleeve or membrane) is removed.

[0074] As will be appreciated by those of skill in the art, repeating pattern A has been described hereinabove and illustrated in Figure 1 in respect of a monotubular stent. Repeating pattern A and all of the features relating thereto illustrated in and described with reference to Figures 1-10 (including modification to include the flexure means illustrated in Figures 12a-12d) is equally applicable to a bifurcated stent such as the one described and illustrated in the '997 application discussed hereinabove.

[0075] While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to this description. It is therefore contemplated that the appended claims will cover any such modifications or embodiments.

#### Claims

1. An unexpanded stent comprising a proximal end and a distal end in communication with one another, a tubular wall disposed between the proximal end and the distal end, the tubular wall having a longitudinal axis and a porous surface defined by a plurality of rows of intersecting members (750, 760, 850, 860, 950, 960), adjacent rows of intersecting members being interconnected by a series of longitudinal struts (735, 740, 770, 835, 840, 870, 935, 940, 970), the stent being expandable from a first, contracted position to a second, expanded position upon the application of a radially outward force on the stent;

characterised in that each longitudinal strut (735, 740, 770, 835, 840, 870, 935, 940, 970) com-

prises an arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) disposed in spaced relation between adjacent rows of intersecting members (750, 760, 850, 860, 950, 960) to allow for substantially complementary extension and compression of a diametrically opposed pair of the longitudinal struts (735, 740, 770, 835, 840, 870, 935, 940, 970) upon flexure of the stent.

2. The stent defined in claim 1, wherein the arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) comprises at least one lateral section disposed in each longitudinal strut (735, 740, 770, 835, 840, 870, 935, 940, 970).
3. The stent defined in claim 2, wherein the at least one lateral section comprises a rounded apex.
4. The stent defined in any one of claims 1-3, wherein the arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) comprises a first lateral section and a second lateral section disposed in each longitudinal strut (735, 740, 770, 835, 840, 870, 935, 940, 970).
5. The stent defined in claim 4, wherein the first lateral section and the second lateral section are symmetric.
6. The stent defined in claim 4, wherein the first lateral section and the second lateral section are asymmetric.
7. The stent defined in any one of claims 1-6, wherein the plurality of intersecting members (750, 760, 850, 860, 950, 960) are arranged to define a first repeating pattern (A) comprised of a polygon having a pair of side walls substantially parallel to the longitudinal axis and the arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) is disposed in each of the side walls.
8. The stent defined in any one of claims 1-7, wherein the arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) comprises an S-shaped portion (736, 741, 771, 836, 841, 936, 941, 971).
9. The stent defined in claim 8, wherein the S-shaped portion (736, 741, 771, 836, 841, 936, 941, 971) comprises a pair of joined curved sections wherein each curved section has an arc of greater than 180°.
10. The stent defined in claim 1, wherein the longitudinal strut (735, 740, 770, 835, 840, 870, 935, 940, 970) comprises an arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) disposed between a first straight section and a second straight

- section.
11. The stent defined in claim 10, wherein both of the first straight section and the second straight second are independent of points of intersection of the plurality of intersecting members (750, 760, 850, 860, 950, 960). 5
  12. The stent defined in any one of claims 10-11, wherein the longitudinal struts (735, 740, 770, 835, 840, 870, 935, 940, 970) are aligned in a spaced relationship parallel to the longitudinal axis. 10
  13. The stent defined in any one of claims 1-12, wherein the series of longitudinal struts (735, 740, 770, 835, 840, 870, 935, 940, 970) comprising the arcuate flexure means (736, 741, 771, 836, 841, 936, 941, 971) includes all longitudinal struts in the porous surface. 15
  14. The stent defined in claim 1, wherein each of the adjacent rows of intersecting members (750, 760, 850, 860, 950, 960) comprise a plurality of apices (754, 764, 854, 954) which are interconnected by the series of longitudinal struts (735, 740, 770, 835, 840, 870, 935, 940, 970). 20
  15. The stent defined in claim 14, wherein the apices (754, 764, 854, 954) are substantially flat. 25
  16. The stent defined in claim 15, wherein each of the apices (754, 764, 854, 954) comprises a pair of rounded shoulders (757, 758, 767, 768, 857, 858, 957, 958). 30

#### Patentansprüche

1. Nicht-expandierter Stent mit einem proximalen und einem distalen Ende, die miteinander in Verbindung stehen, mit einer hülsenförmigen Wand, die zwischen dem proximalen und dem distalen Ende angeordnet ist und die eine Längsachse sowie eine poröse Fläche aufweist, definiert aus einer Mehrzahl von Reihen von sich schneidenden Elementen (750, 760, 850, 860, 950, 960), wobei einander benachbarte Reihen sich schneidender Elemente durch eine Anzahl von Längsstreben (735, 740, 770, 835, 840, 870, 935, 940, 970) miteinander verbunden sind, wobei der Stent bei Aufbringen einer radial nach außen gerichteten Kraft expandierbar ist zwischen einer ersten, zusammengezogenen Position zu einer zweiten, expandierten Position, dadurch gekennzeichnet, daß jede Längsstrebe (735, 740, 770, 835, 840, 670, 935, 940, 970) ein bogenförmiges Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) in einem Abstand zwischen einander benachbarten Reihen von sich schneidenden 40

Elementen (750, 760, 850, 860, 950, 960) aufweisen, um eine im wesentlichen komplementäre Ausdehnung und Kompression von diametral einander gegenüberliegender Paare von Längsstreben (735, 740, 770, 835, 840, 870, 935, 940, 970) bei Biegen des Stents zu ermöglichen.

2. Stent nach Anspruch 1, wobei das bogenförmige Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) wenigstens einen seitlichen Abschnitt aufweist, der in jeder Längsstrebe (735, 740, 770, 835, 840, 870, 935, 940, 970) angeordnet ist, 10

3. Stent nach Anspruch 2, wobei der einzelne seitliche Abschnitt einen gerundeten Scheitel aufweist. 15

4. Stent nach einem der Ansprüche 1 bis 3, wobei das bogenförmige Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) einen ersten und einen zweiten seitlichen Abschnitt aufweist, angeordnet in jeder Längsstrebe (735, 740, 770, 835, 840, 670, 935, 940, 970). 20

5. Stent nach Anspruch 4, wobei der erste und der zweite seitliche Abschnitt symmetrisch sind, 25

6. Stent nach Anspruch 4, wobei der erste und der zweite seitliche Abschnitt asymmetrisch sind.

7. Stent nach einem der Ansprüche 1 bis 6, wobei die Mehrzahl von sich schneidenden Elementen (750, 760, 850, 860, 950, 960) derart angeordnet sind, daß sie ein erstes, sich wiederholendes Muster (A) definieren, gebildet aus einem Polygon mit zwei Seitenwänden, die im wesentlichen parallel zur Längsachse verlaufen, und wobei das bogenförmige Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) in jeder Seitenwand angeordnet ist. 30

8. Stent nach einem der Ansprüche 1 bis 7, wobei das bogenförmige Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) einen S-förmigen Teil (736, 741, 771, 771, 836, 841, 936, 941, 971) aufweist. 35

9. Stent nach Anspruch 8, wobei der S-förmige Teil (736, 741, 771, 771, 836, 841, 936, 941, 971) zwei zusammengefügte gekrümmte Abschnitte aufweist, deren jeder einen Bogen von mehr als 180° umfaßt. 40

10. Stent nach Anspruch 1, wobei die Längsstrebe (735, 740, 770, 835, 840, 870, 935, 940, 970) ein bogenförmiges Biegeelement (736, 741, 771, 836, 841, 936, 941, 971) aufweist, angeordnet zwischen einem ersten und einem zweiten gradlinigen Abschnitt. 45

11. Stent nach Anspruch 10, wobei die beiden gradlini- 50

- gen Abschnitte unabhängig von Schnittpunkten der Mehrzahl von sich schneidenden Elementen (750, 760, 850, 860, 950, 960) angeordnet sind.
12. Stent nach einem der Ansprüche 10 oder 11, wobei die Längsstreben (735, 740, 770, 835, 840, 870, 935, 940, 970) in einem Abstand parallel zur Längsachse ausgerichtet sind. 5
13. Stent nach einem der Ansprüche 1 bis 12, wobei die Anzahl von Längsstreben (735, 740, 770, 835, 840, 870, 935, 940, 970), umfassend bogenförmige Biegeelemente (736, 741, 771, 836, 841, 936, 941, 971) sämtliche Längsstreben in der porösen Fläche umfassen. 10
14. Stent nach Anspruch 1, wobei jede Reihe von sich schneidenden Elementen (750, 760, 850, 860, 950, 960) eine Mehrzahl von Scheiteln (754, 764, 854, 954) aufweist, die durch die Anzahl von Längsstreben (735, 740, 770, 835, 840, 870, 935, 940, 970) miteinander verbunden sind. 15
15. Stent nach Anspruch 14, wobei die Scheitel (754, 764, 854, 954) im wesentlichen flach sind. 20
16. Stent nach Anspruch 15, wobei jeder Scheitel (754, 764, 854, 954) zwei gerundete Schultern (757, 758, 767, 768, 857, 858, 957, 958) umfaßt. 25
- Revendications**
1. Un extenseur vasculaire non expansé comprenant une extrémité proximale et une extrémité distale en communication l'une avec l'autre, une paroi tubulaire disposée entre l'extrémité proximale et l'extrémité distale, la paroi tubulaire ayant un axe longitudinal et une surface poreuse définies par une pluralité de rangées de pièces entrecroisées (750, 760, 850, 860, 950, 960), des rangées adjacentes de pièces entrecroisées étant interconnectées par une série de piliers longitudinaux (735, 740, 770, 835, 840, 870, 935, 940, 970), l'extenseur vasculaire étant expansible à partir d'une première position contractée jusqu'à une seconde position expansée lors de l'application d'une force radiale vers l'extérieur sur l'extenseur vasculaire, caractérisé en ce que chaque pilier longitudinal (735, 740, 770, 835, 840, 870, 935, 940, 970) comprend des moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) disposés de façon espacée entre des rangées adjacentes de pièces entrecroisées (750, 760, 850, 860, 950, 960) pour permettre une extension et une compression complémentaires considérables d'une paire de piliers longitudinaux diamétralement opposés (735, 740, 770, 835, 840, 870, 935, 940, 970) lors de la flexion de l'extenseur vasculaire. 30
2. L'extenseur vasculaire défini dans la revendication 1, dans lequel les moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) comprennent au moins une partie latérale disposée dans chaque pilier longitudinal (735, 740, 770, 835, 840, 870, 935, 940, 970). 35
3. L'extenseur vasculaire défini à la revendication 2, dans lequel au moins une partie latérale comprend un sommet arrondi. 40
4. L'extenseur vasculaire défini dans l'une quelconque des revendications 1 à 3, dans lequel les moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) comprennent une première partie latérale et une deuxième partie latérale disposées dans chaque pilier longitudinal (735, 740, 770, 835, 840, 870, 935, 940, 970). 45
5. L'extenseur vasculaire défini à la revendication 4, dans lequel la première partie latérale et la deuxième partie latérale sont symétriques. 50
6. L'extenseur vasculaire défini à la revendication 4, dans lequel la première partie latérale et la deuxième partie latérale sont asymétriques. 55
7. L'extenseur vasculaire défini dans l'une quelconque des revendications 1 à 6, dans lequel la pluralité de pièces entrecroisées (750, 760, 850, 860, 950, 960) sont disposées pour définir un premier motif répété (A) constitué d'un polygone présentant une paire de parois latérales sensiblement parallèles à l'axe longitudinal et les moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) étant disposés dans chacune des parois latérales.
8. L'extenseur vasculaire défini à l'une des revendications 1 à 7, dans lequel les moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) comprennent une partie en forme de S (736, 741, 771, 836, 841, 936, 941, 971).
9. L'extenseur vasculaire défini à la revendication 8, dans lequel la partie en forme de S (736, 741, 771, 836, 841, 936, 941, 971) comprend une paire de parties courbées jointes dans laquelle chaque partie courbée présente un arc supérieur à 180°.
10. L'extenseur vasculaire défini à la revendication 1, dans lequel le pilier longitudinal (735, 740, 770, 835, 840, 870, 935, 940, 970) comprend des moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) disposés entre une première partie droite et une deuxième partie droite.
11. L'extenseur vasculaire défini à la revendication 10, dans lequel à la fois la première partie droite et la

deuxième partie droite sont indépendantes des points de croisement de la pluralité de pièces entrecroisées (750, 760, 850, 860, 950, 960).

12. L'extenseur vasculaire défini à l'une des revendications 10 à 11, dans lequel les piliers longitudinaux (735, 740, 770, 835, 840, 870, 935, 940, 970) sont alignés de façon espacée parallèle à l'axe longitudinal. 5
13. L'extenseur vasculaire défini à l'une des revendications 1 à 12, dans lequel les séries de piliers longitudinaux (735, 740, 770, 835, 840, 870, 935, 940, 970) comprenant les moyens de flexion arqués (736, 741, 771, 836, 841, 936, 941, 971) comprennent tous les piliers longitudinaux dans la surface poreuse. 10  
15
14. L'extenseur vasculaire défini à la revendication 1, dans lequel chacune des rangées adjacentes de pièces entrecroisées (750, 760, 850, 860, 950, 960) comprend une pluralité de sommets (751, 764, 854, 954) qui sont interconnectés par les séries de piliers longitudinaux (735, 740, 770, 835, 840, 870, 935, 940, 970). 20  
25
15. L'extenseur vasculaire défini à la revendication 14, dans lequel les sommets (754, 764, 854, 954) sont sensiblement plats. 30
16. L'extenseur vasculaire défini à la revendication 15, dans lequel chacun des sommets (754, 764, 854, 954) comprend une paire d'épaulements arrondis (757, 758, 767, 768, 857, 858, 957, 958). 35

40

45

50

55

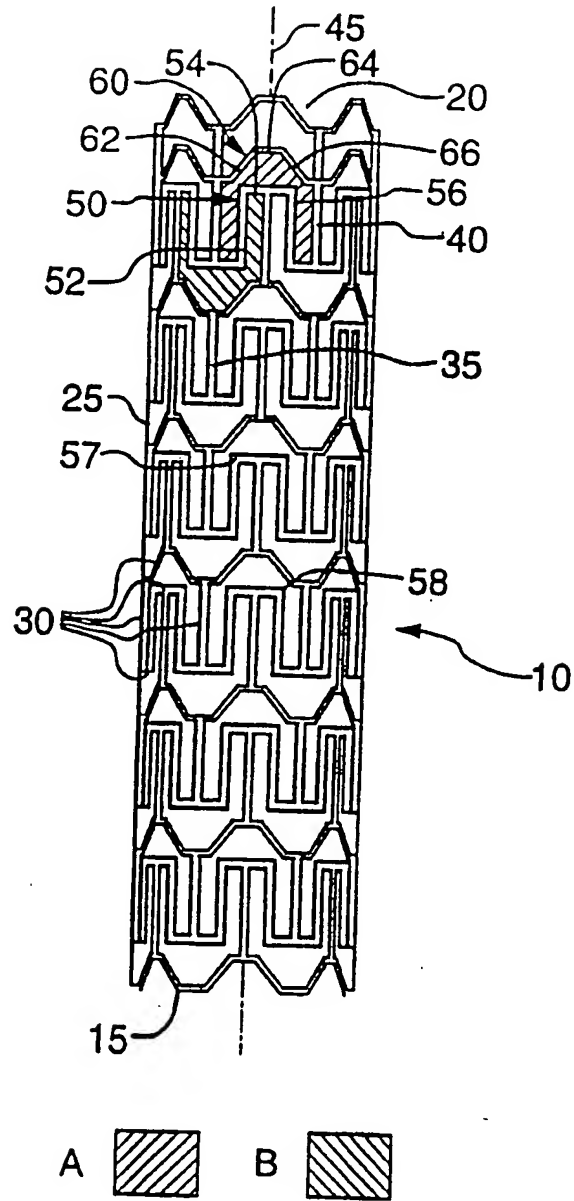


FIG.1

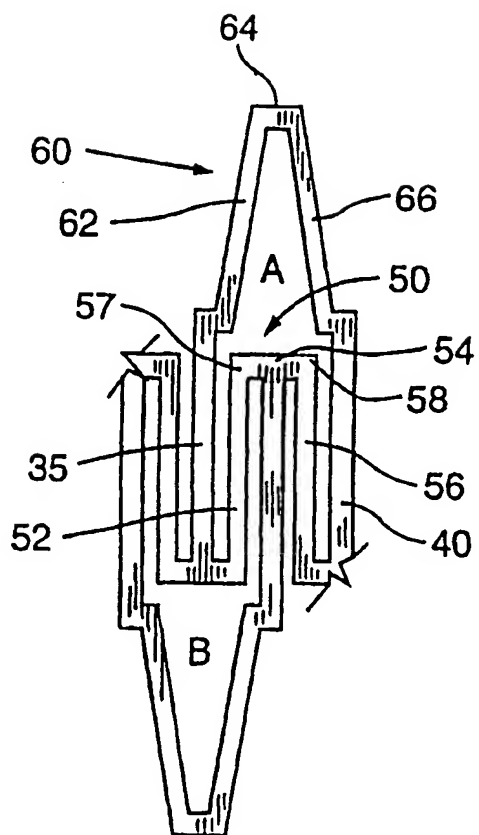


FIG.1A

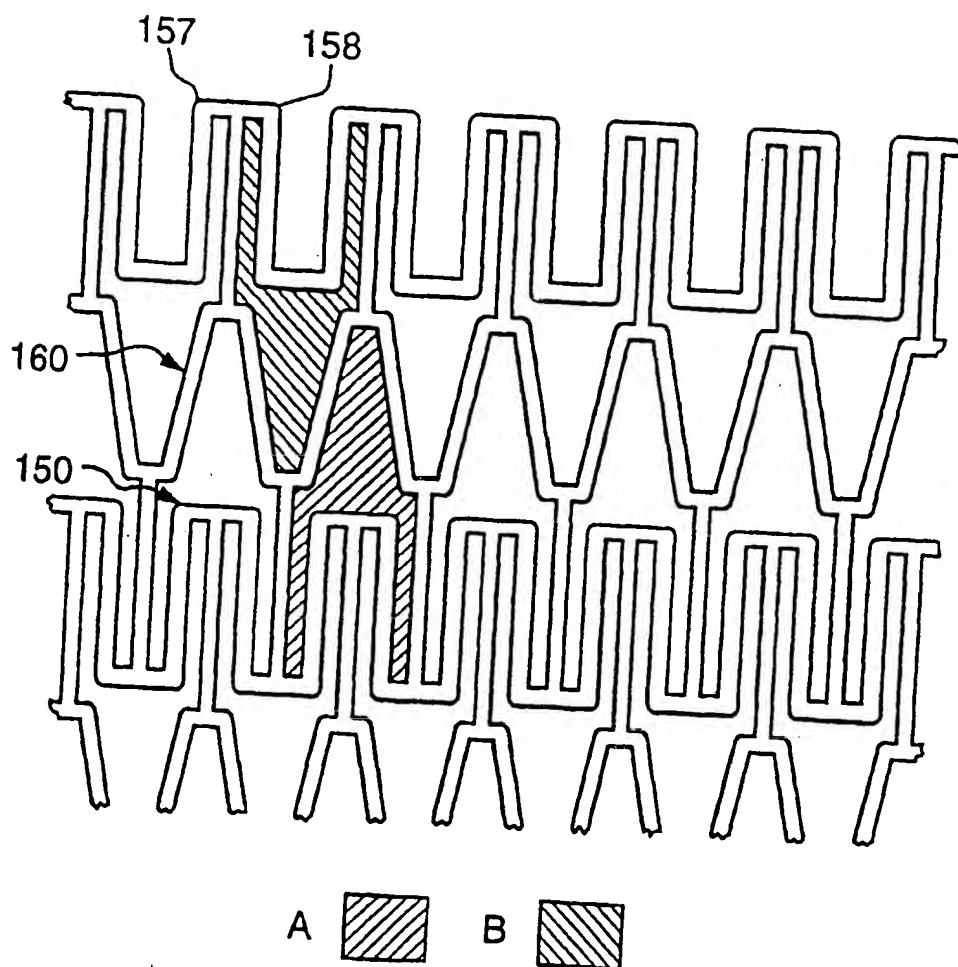


FIG.2

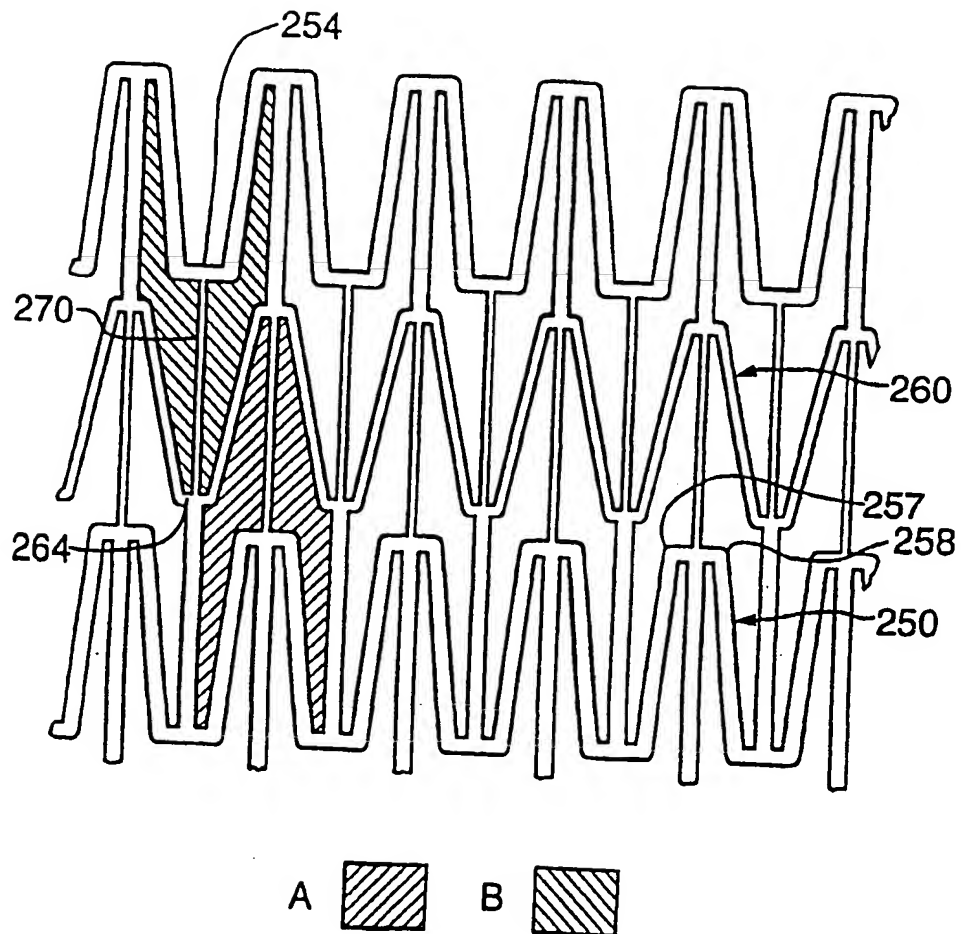


FIG.3

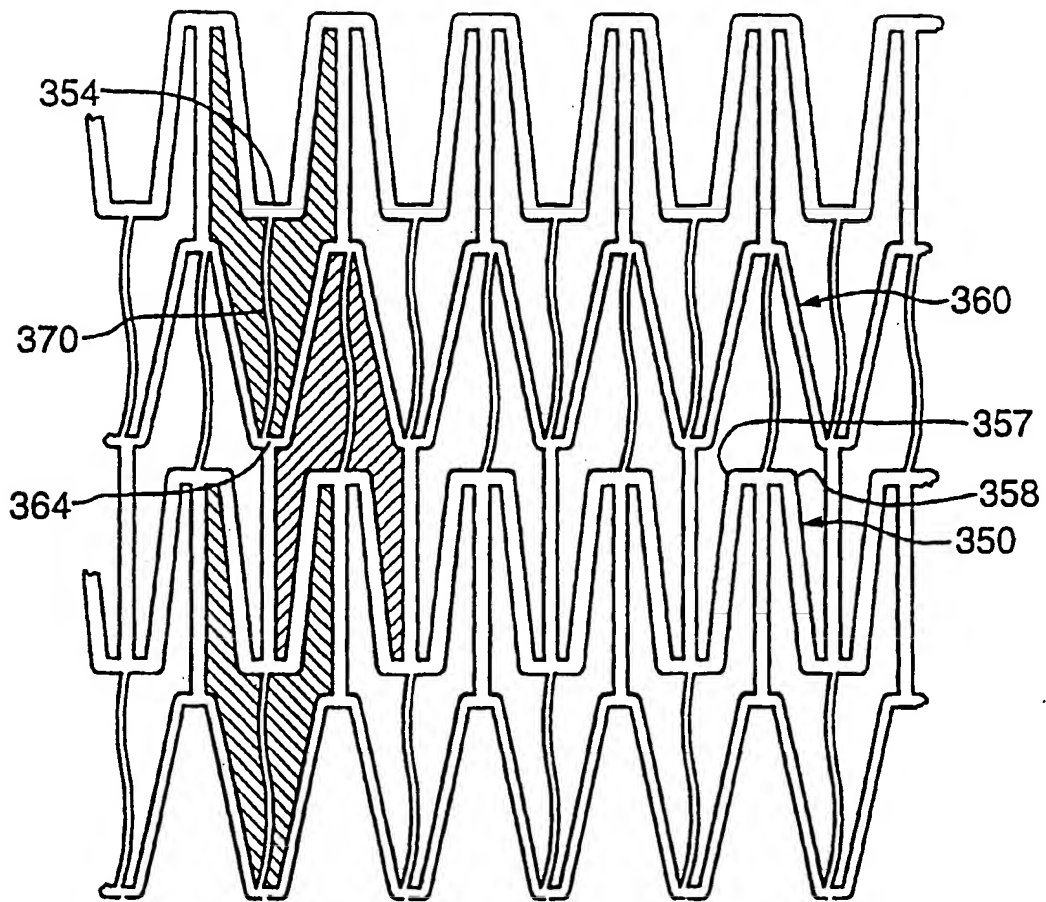


FIG.4

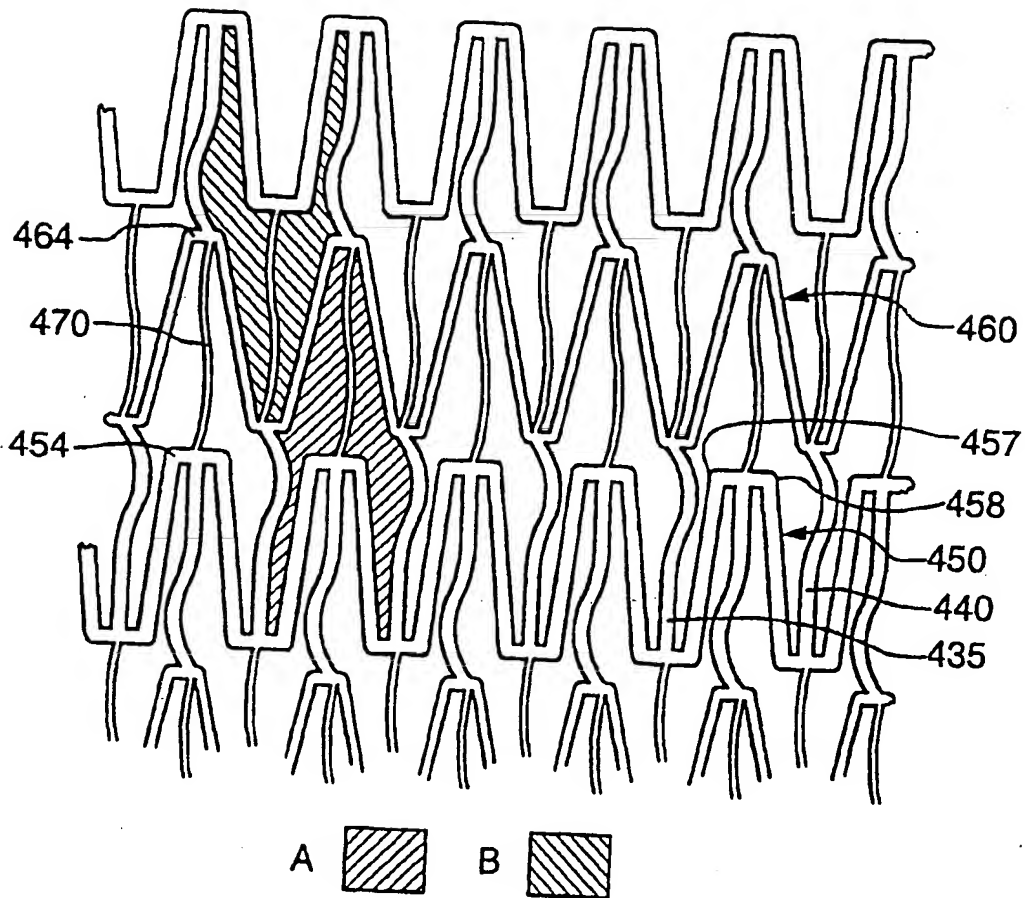


FIG.5

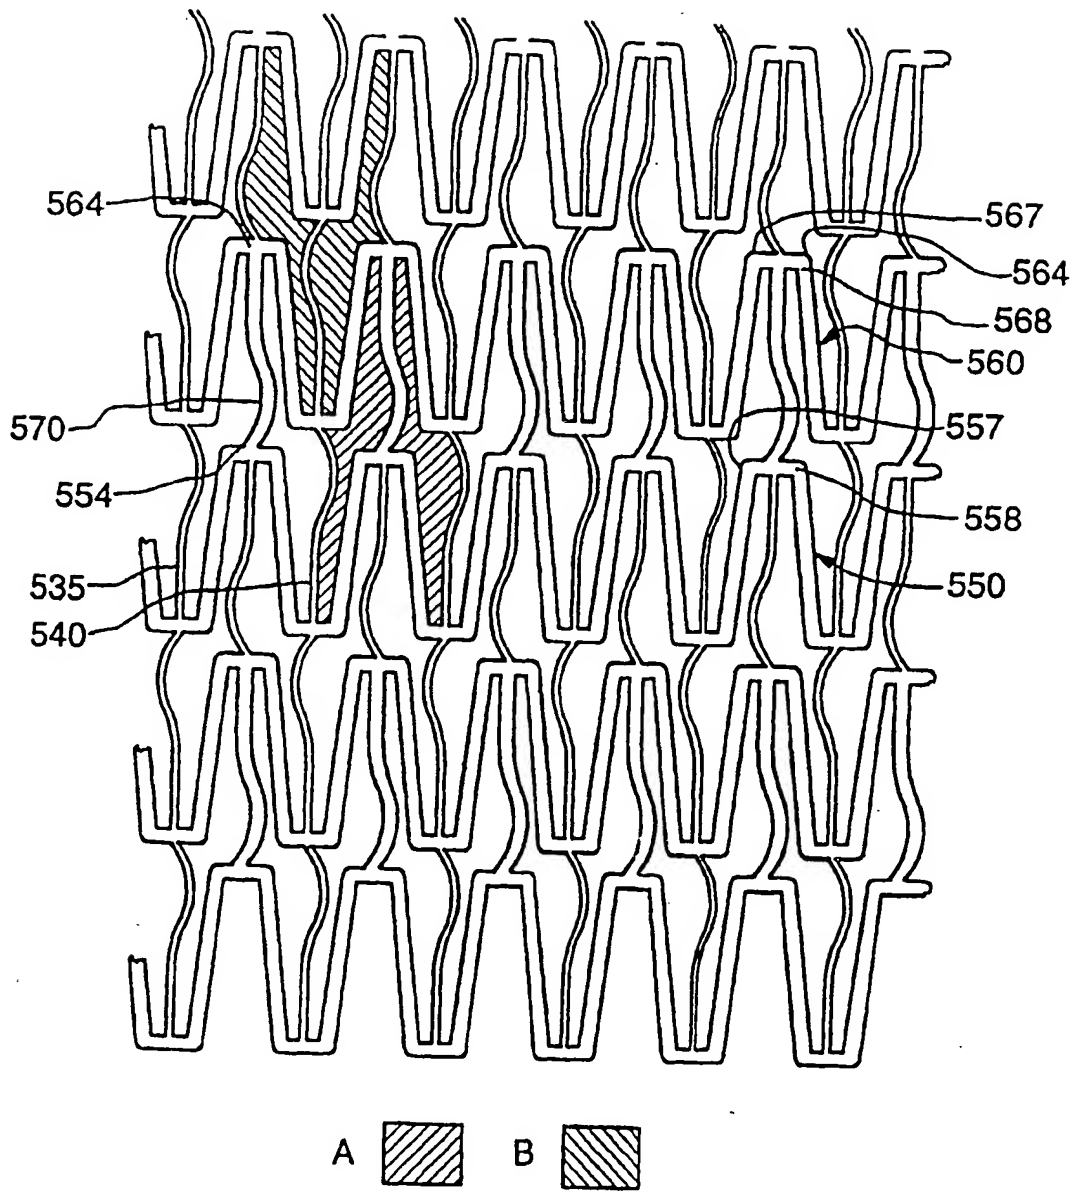


FIG. 6

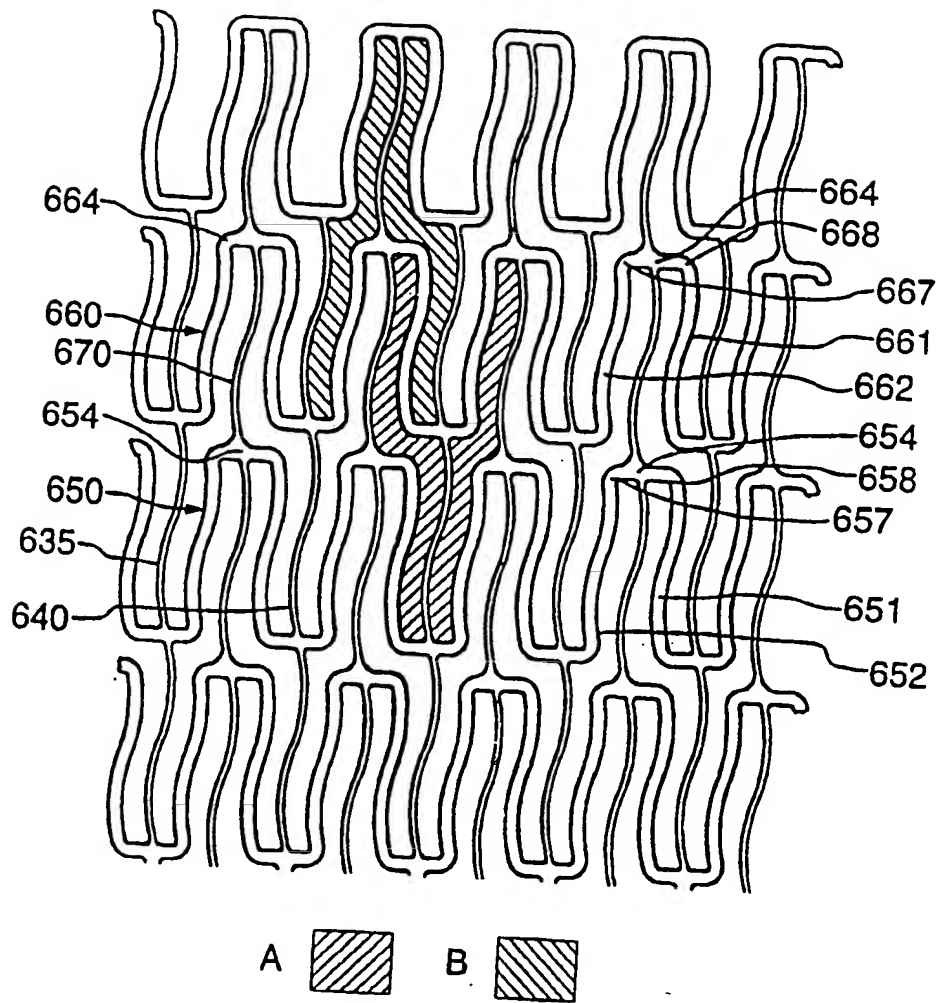


FIG. 7

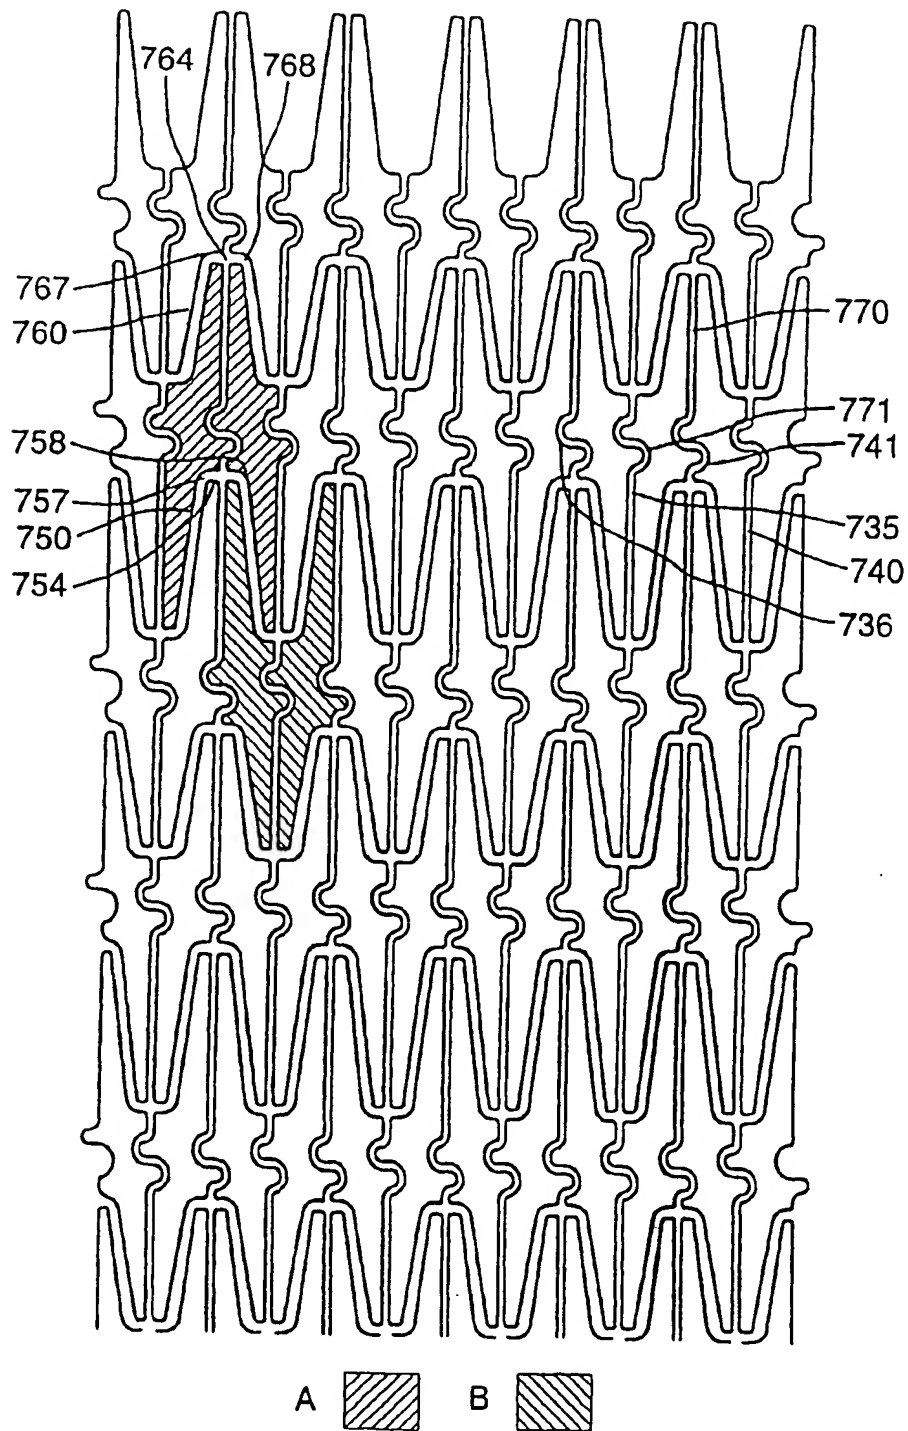


FIG. 8

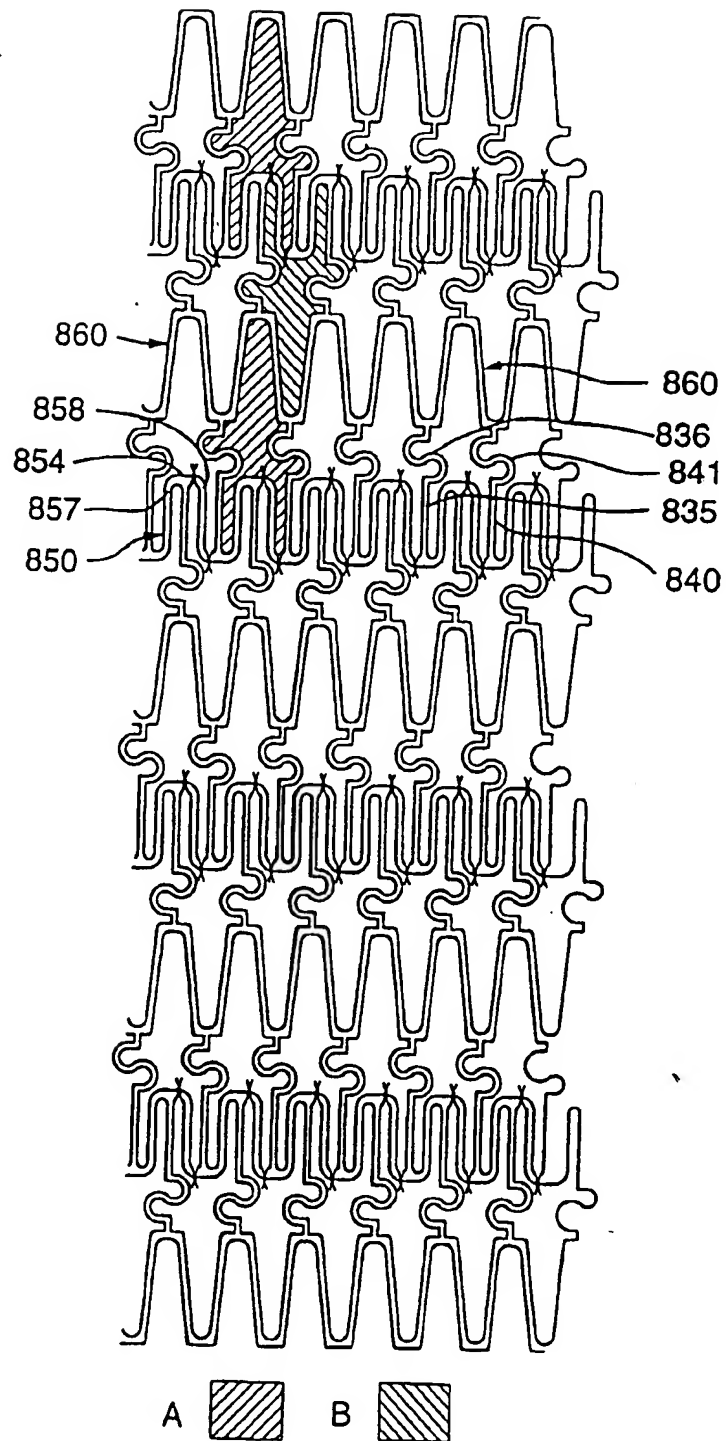


FIG.9

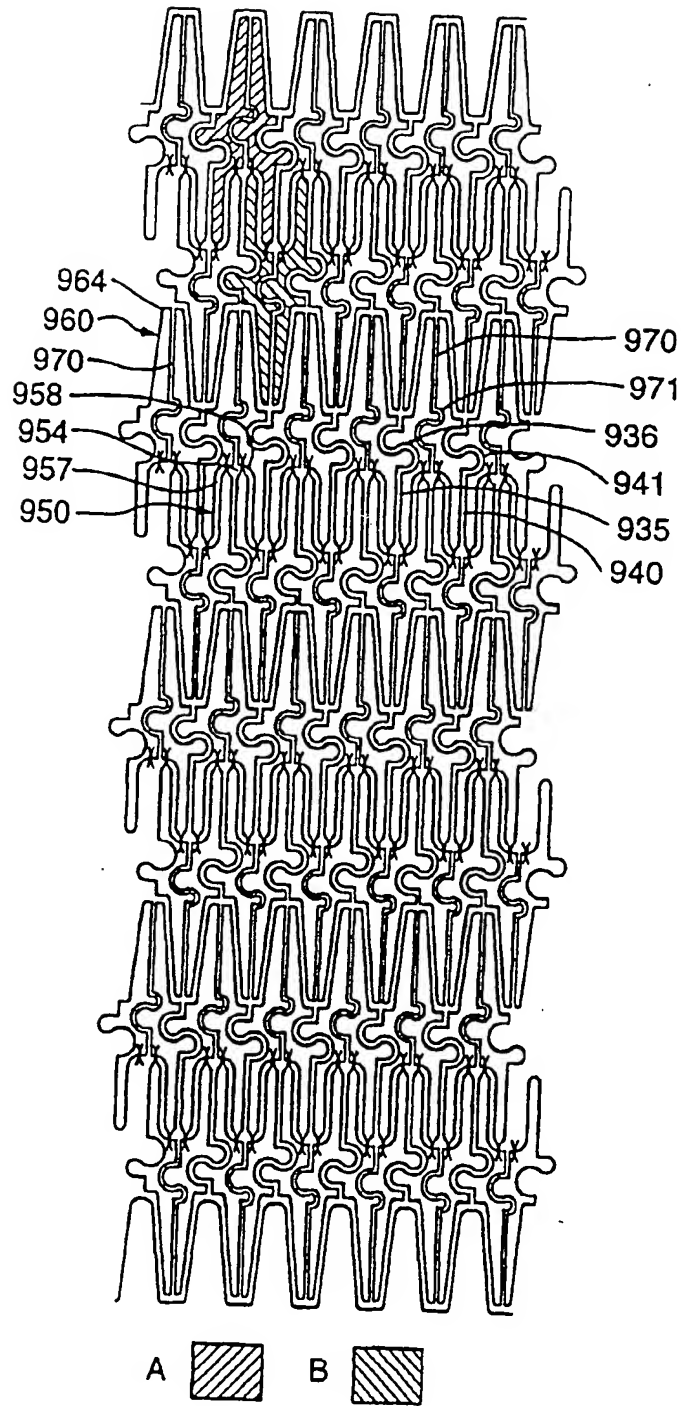


FIG.10

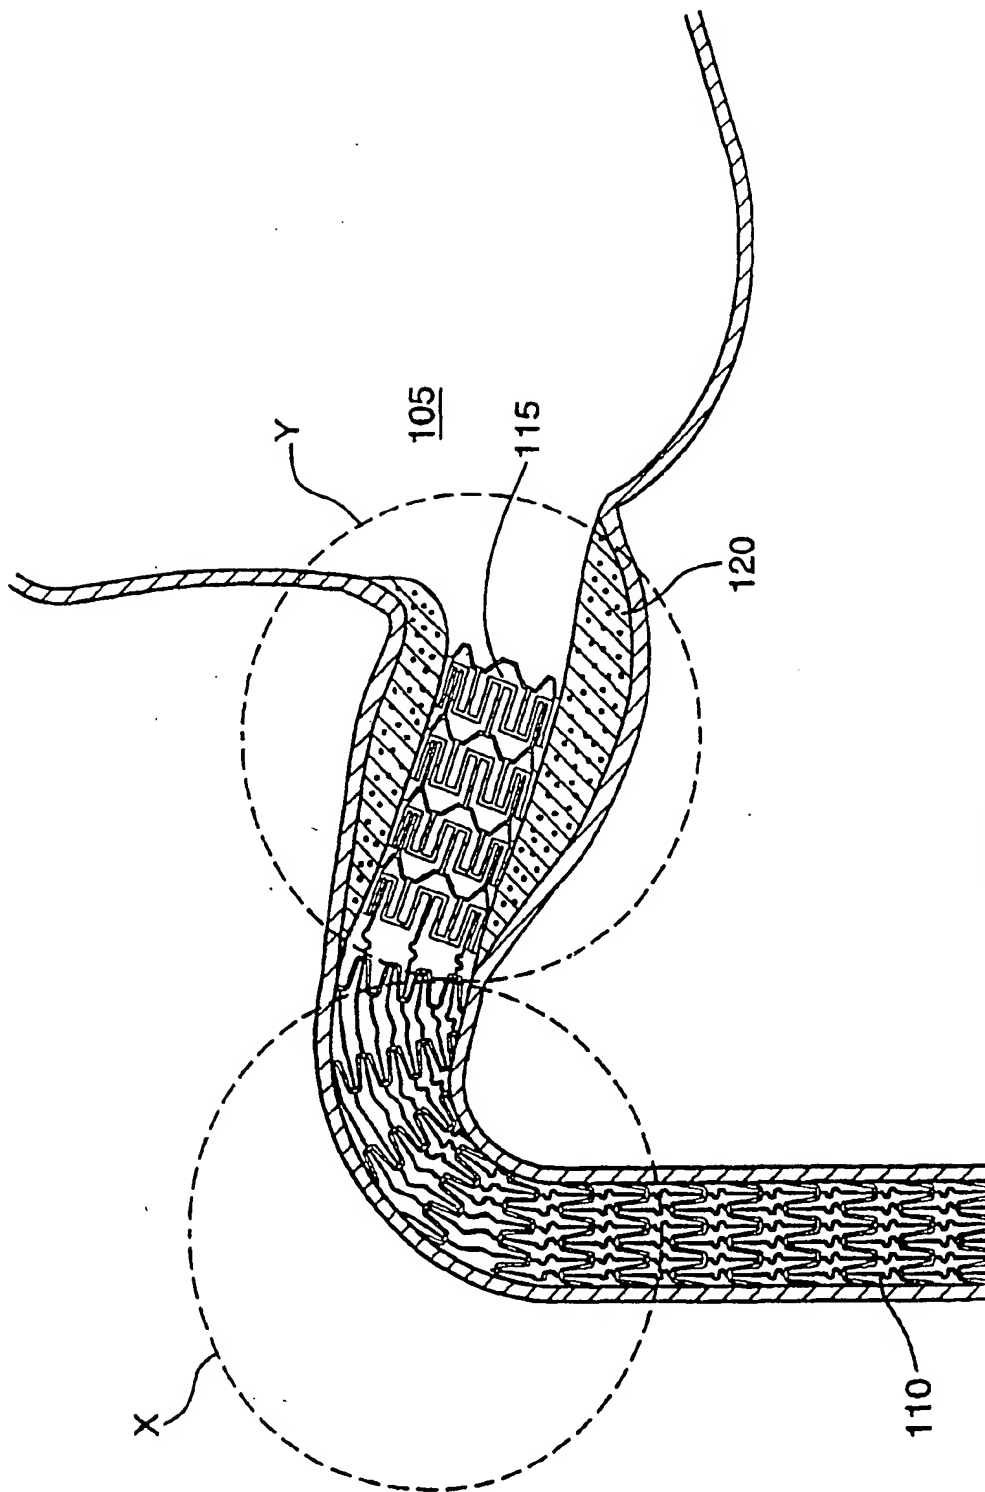


FIG.11

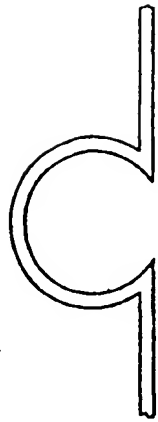


FIG. 12a.

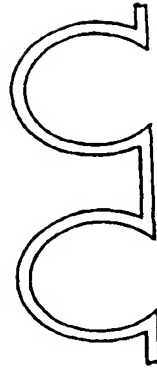


FIG. 12b.

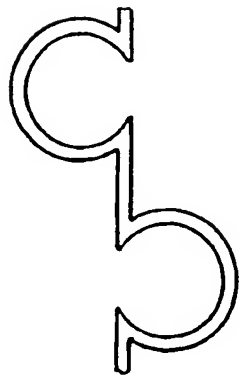


FIG. 12c.

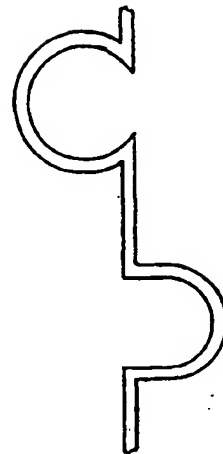


FIG. 12d.